



RV908M32 Receiver Specifications

V3.0



Revision History

Document	Hardware	Revision	Note
Version	Version	Date	
V3.0	V10	2020/1	New edition

Overview


RV908H32 is a standardize product for LED screen manufacturer, which is integrated with 12 standard hub75-type connectors and does not require an extra hub card. One card supports up to 384*512pixels and up to 24 sets of RCG data.

Functions and features


- 1. Single card can support 24 group of RGB data output mode
- 2. Maximum supports 384X512 pixels (Please note that there are recommended values depending on the design of LED screen)
- 3. Supports brightness calibration pixel by pixel and single-card color space conversion
- 4. Supports network cable BER test
- 5. Supports configuration file read back
- 6. Supports 138 decode, 595 serial decode and so on
- 7. Realizes high refresh and high gray level effect



Appearance

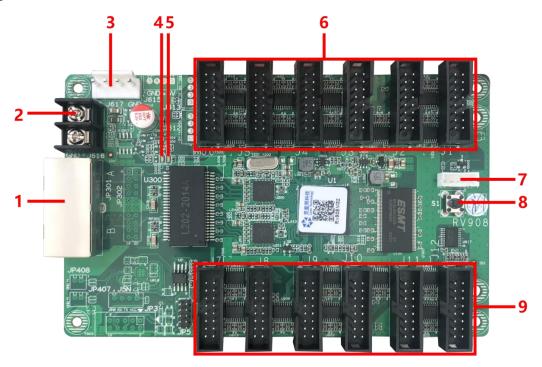



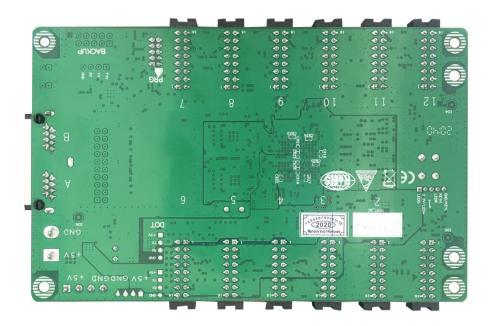

Official website: www.linsn.com

Add: Floor 15&16, Jiajiahao Business Building, No. 10168, Shennan Blvd,
Nanshan District, Shenzhen
Tel: +86-0755-86183590/ 4008836968



No.	1	2	3	4
Description	Gigabit port	Power	Power port	Red power
		connector		indicator
No.	5	6/9	7	8
Description	Green indicator	Hub75	Self-test	Self-test button
		Connector	extension port	

Pinouts

J1					
R1	1	1	2	2	G1
B1	3	3	4	4	GND
R2	5	5	6	6	G2
B2	7	7	8	8	E
A	9	9	10	10	В
С	11	11	12	12	D
CLK	13	13	14	14	LAT
OE	15	15		16	GND
		13	16		
16PIN					


/	R1	1	2	G1	/
/	B1	3	4	GND	GND
/	R2	5	6	G2	/
/	В2	7	8	Е	Row selection
					signal
Row selection	A	9	10	В	Row selection
signal					signal
Row selection	С	11	12	D	Row selection
signal					signal
Scan clock	CLK	13	14	LAT	Latch
Display enable	OE	15	16	GND	GND

Official website: www.linsn.com

Add: Floor 15&16, Jiajiahao Business Building, No. 10168, Shennan Blvd,
Nanshan District, Shenzhen
Tel: +86-0755-86183590/4008836968



Dimension

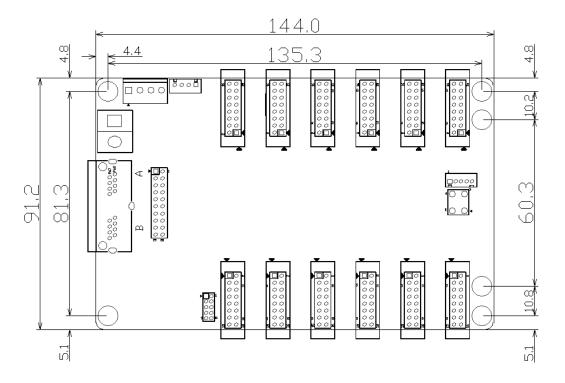

Specifications

Capacity	384X512 Pixels		
	Input Voltage	DC4.5V ~ 5.5V	
Power	Rated power	3W	
	consumption		
Working	Temperature	-20°C ~ 70°C	
Environment	Humidity	0% ~ 95%	
Physical	Dimensions	144.0 X 91.2mm	
Dimensions	Weight	99g	
Packing	Packing	Each card packed with small red foam	
Info		bag, and 100pcs per carton	



Carton Dimension	622.0mm×465.0mm×176.0mm
Carton Weight	12.7 kg

END