

Specification

Controller TS952

V1.5 2018.Jul

Summary:

TS952 is a controller with four network ports, and supports single, double and full color LED screen. It also supports 4K video source input and its maximum capability is 2.6 million pixels.



Features:-


- 1) One Audio signal input;
- 2) One DVI video signal input;
- 3) One HDMI video signal input;
- 4) Supports RCG file read-back function;
- 5) Supports RCG file broadcasting function;
- 6) Supports CON file broadcasting function;
- 7) With four network output ports, supports common video source, like 2560x1024, 1920x1200, 2048x1152, etc;
- 8) Supports cascade function;
- 9) Supports brightness auto-adjustment (requires light sensor).



Appearance:



Interface introduction		
1	Power button/ indicator	
2	Power input: AC100~240V	
3	Indicator: red for power; green for signal	
4	3.5mm audio input	
5	USB connector for setup	
6	HDMI signal input	
7	DVI signal input	
8	4 gigabit network ports	
9	UART-IN: cascade input	
10	UART-OUT: cascade output	
11)	Light sensor connector for brightness auto-adjustment	

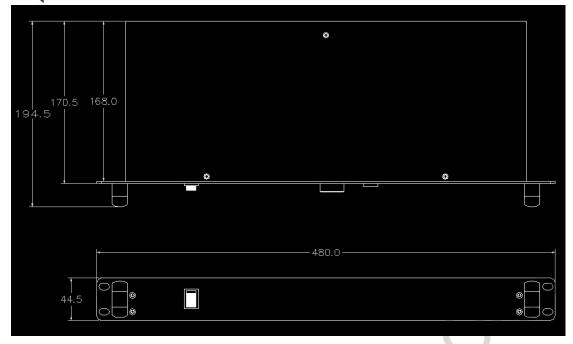

Working conditions:

Rated power consumption(W)	20
Working temperature ($^{\circ}$ C)	-20℃ ~75℃
Working humidity (%)	0% ~ 95%
Weight (KG)	3

END