



Product Specifications

Receiving card

HD-R512S

V2.0 20200303

Shenzhen Huidu Technology Co., Ltd

www.huidu.cn

1



1. Overview

R512S, on-board 12*HUB75E ports, compatible with R500/R508/R512/R516/R612.

2. Parameters

Dual-mode sending box, Asynchronous sending card,		
Synchronous sending card, Video processor of VP series.		
Compatible with all common IC module, supported most PWM IC module.		
Supports any scanning method from static to 1/64 scan		
Gigabit Ethernet		
Recommend: 65,536 pixels (128*512)		
Outdoor module width \leq 256, Indoor module width \leq 128		
Receiving card can be put in any sequence		
256~65536		
A few simple steps to complete the smart settings, through the screen layout can be set to go with any alignment of the screen unit board		
Receiving card integrated screen test function, Test display brightness uniformity and display module flatness.		
Super Cat5,Cat6 network cable within 80 meters		
5V DC Power*2,1Gbps Ethernet port*2, HUB75E*12		
4V-6V		
5W		


www.huidu.cn

2




3. Connection Method

Connection diagram of connecting R512S with display player box:

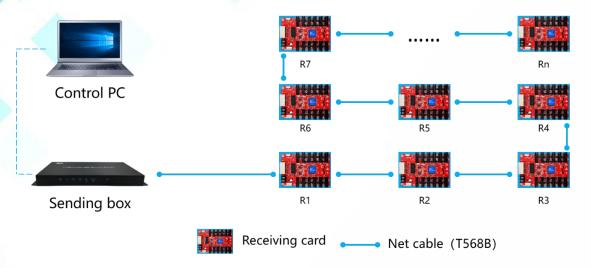


4. Dimensions

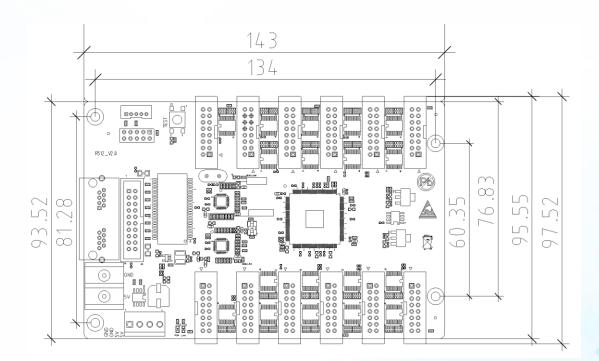




5. Interface Definition




6. Appearance Description

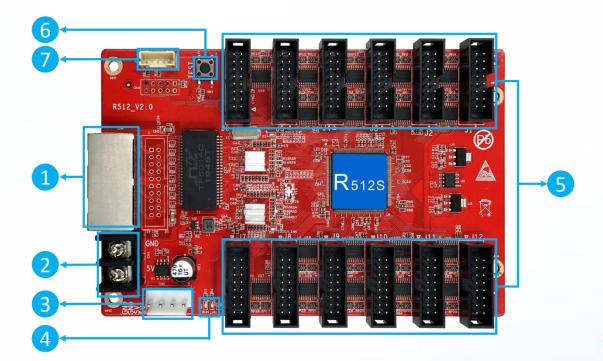

(1): Gigabit Ethernet port, used to connect the sending card or receiving card, the same two network ports are interchangeable,

(2): Power interface, can be accessed with $4.5V \sim 5.5V$ DC voltage;



(4): Work indicator, D1 flashes to indicate that the control card is running normally; D2 flashes quickly to indicate that Gigabit has been recognized and data is being received.

(5): HUB75Eport, connect to the modules,

灰度科技

(6): Test button, used to test display brightness uniformity and display module flatness.

(7): External indicator light, run light and data light.

	Minimum	Typical	Maximum
Rated voltage(V)	4.2	5.0	5.5
Storage temperature(°C)	-40	25	105
Work environment temperature(°C)	-40	25	80
Work environment humidity (%)	0.0	30	95
Net weight (kg)	0.091		
Certificate	CE, FCC, RoHS		

7. Technical Parameters

Precautions

1) ensure the system long-term stable running, please keep to use the standard 5V power supply voltage.

2) Different production batches, color appearance and labels may be different.